

# Type PTS

## Sampling system for sample drawing at the top



for liquids

sampling volume per operation:

$V_{P\ min}$  25 ml /  $V_{P\ max}$  100 ml


- no cavities
- based on CONTIFLOW design
- with pneumatic pump

Range of application:

$-10 < T < 150^{\circ}\text{C}$

vacuum-capable

Ventilation: internally back to system or to atmosphere

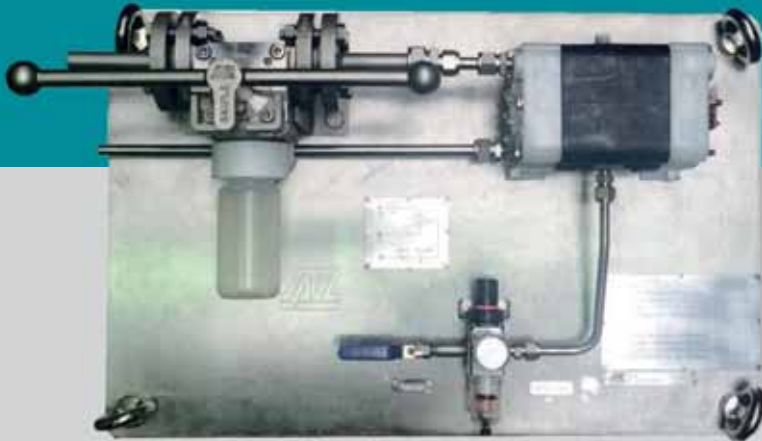

### Design characteristics

- complete system
- safe and simple operation
- with circulation pump
- representative sample
- material: Stainless steel 1.4308, ASTM A351 CF8

### Functionality

